

# Vertical Conveyor IVKE 50

## Applications

Vertical conveyor Type IVKE 50 is intended for transport of unit loads such as boxes, trays, tote bins, etc.

## Description

Vertical conveyor, continuous, complete with drive unit and supporting surface.

## Capacity

Max. 25 products/min. Product weight max. 20 kg. Max. load total 80 kg.

## Order example

IVKE 50 - 404 - 2000

Type – LH




## Specification

	Material/Type	Finish
Stand	Aluminium/Steel	Anodized/Zinc-plated
Casing	Aluminium/Polycarbonate	Anodized/Transparent
Motor shelf	Steel	Zinc-plated
Motor	SEW/Gear drive motor	Enamelled

## Technical data

Type	Range of lift LH mm	Speed v m/min	Product Max. LxB mm	Power kW	Voltage V	Amperage A
IVKE 50 - 404	600 - 4500	16.2	400 x 400	0.37	3 x 230/400	2,15/1,24
IVKE 50 - 606	600 - 4500	16.2	600 x 600	0.37	3 x 230/400	2,15/1,24

When ordering, contact Intersystem

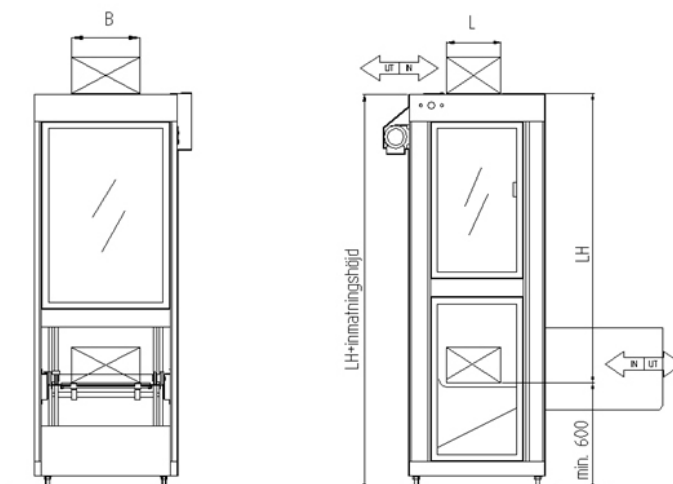

# INTER SYSTEM

Tel: +46 431 44 91 00

[info@intersystem.se](mailto:info@intersystem.se)

[www.intersystem.se](http://www.intersystem.se)