

MH270

Desiccant Dehumidifier



Product Description

The MH270 desiccant dehumidifier is designed to efficiently dehumidify air. It is designed for extended periods of operation and has a common fan for both process and reactivation airflows (i.e. a three hole unit). It contains a distribution chamber with isolated sections that provide a precise balance for dehumidification, purge, reactivation, and heat recovery airflows. It is available with either a standard version or an advanced version control panel. Its rugged formed metal frame and access panels are produced from corrosion resistant ALUZINK®. The electrical control system conforms to EN 60204 (IEC204) standards and the electrical components are assembled behind the control panel. MH Series dehumidifiers conform to both harmonised European Standards and to CE marking specifications.

Munters Rotor Technology

The desiccant rotor is manufactured from a corrugated composite material that is highly effective at attracting and holding water vapour. Every Munters dehumidifier applies a unique rotor technology. Airflows, air conditions, rotor sections, and rotor rotation speeds are optimised for specific applications. An innovative control system maximises the units energy efficiency. A characteristic of the MH Series rotor technology is two extra rotor sectors which provide high capacity, while simultaneously recovering heat, thereby effectively reducing the electrical power requirement.

PRODUCT INFORMATION

MH270

Features


- Dehumidifies efficient down to -20°C.
- Requires minimal floor area.
- Easy to carry.
- Airflow test points - reliable adjustment.
- Advanced control panel as option - monitors system operation status and remote alarm.



Model MH270

Diagram measurements are for reference only.

Scaled and dimensioned AutoCad drawings are available in Munters DryCap program.

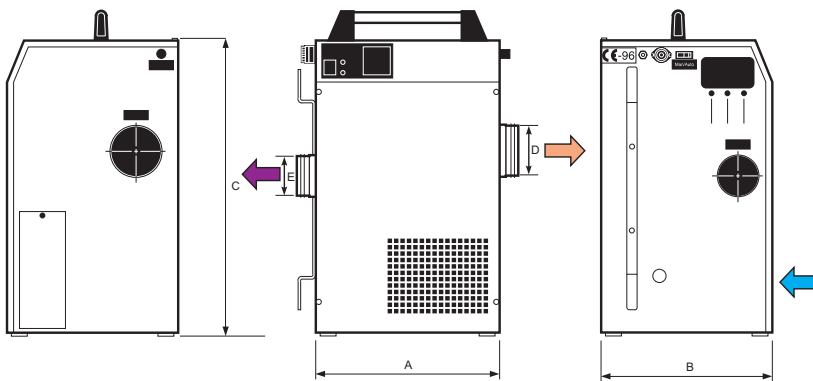

Width (A)	Depth (B)	Height (C)	Diam. (D)	Diam. (E)	Weight
355 mm	335 mm	565 mm	100 mm	80 mm	22 kg

Technical Specification

Process air

Rated airflow (m ³ /h)	270
Reduced airflow (m ³ /h)	185
Available static pressure (Pa)	190

Reactivation air

Reduced airflow (m ³ /h)	80
Available static pressure (Pa)	175

Total power, voltage and current (amps/phase)


Total power(kW)	1,96
230V 1-50Hz (A)	8,5
240V 1-50Hz (A)	8,5

Miscellaneous data

Operating temperature (°C)	-20/+40
Max noise level unducted (dBA)	53,5
Air filter standard	G3
IEC protective class (unit)	IP44
IEC protective class (electrical panel)	IP54

Dehumidification capacity

Approximate capacity in kg/h at different inlet process air relative humidity, % RH.

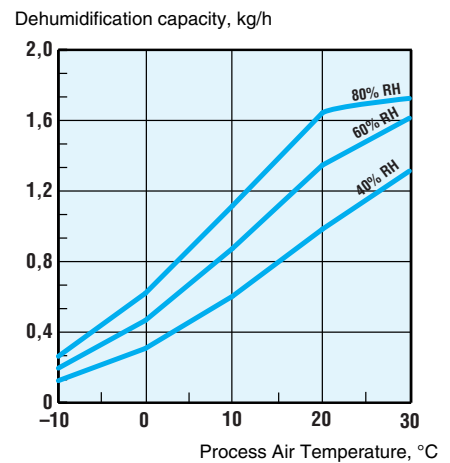

Options

- Electromechanical humidistat
- Stainless steel sheet metal casing

AUSTRALIA
Tel +61 2 8843 1588
CHINA
Tel +86 10 804 18000
INDIA
Tel +91 20 668 18 900
NETHERLANDS
Tel +31 172 43 32 31
SWEDEN
Tel +46 8-626 6300
UNITED KINGDOM
Tel +44 1480 432 243

AUSTRIA
Tel +43 1 6164298-0
DENMARK
Tel +45 4495 3355
ITALY
Tel +39 0183 521377
POLAND
Tel +48 58 305 35 17
SWITZERLAND
Tel +41 52 3438886
UNITED STATES
Tel +1 978 241 1100

BELGIUM
Tel +32 2 240 68 68
FINLAND
Tel +358 20 776 8230
JAPAN
Tel +81 3 5970 0021
SINGAPORE
Tel +65 6744 6828
THAILAND
Tel +66 2 642 2670-3
VIETNAM
Tel +84 8 825 6838

BRAZIL
Tel +55 41 3317 5050
FRANCE
Tel +33 1 3411 5757
KOREA
Tel +82 2 761 8701
SOUTH AFRICA
Tel +27 11 997 2000
TURKEY
Tel +90 262 751 3750

CANADA
Tel +1 905 8585894
GERMANY
Tel +49 40-879690-0
MEXICO
Tel +1 52 722 270-4029
SPAIN
Tel +34 91 640 09 02
UNIT. ARAB EMIRATES
Tel +971 4 8809295

www.munters.com

